


# TILE PATTERN LIBRARY




1

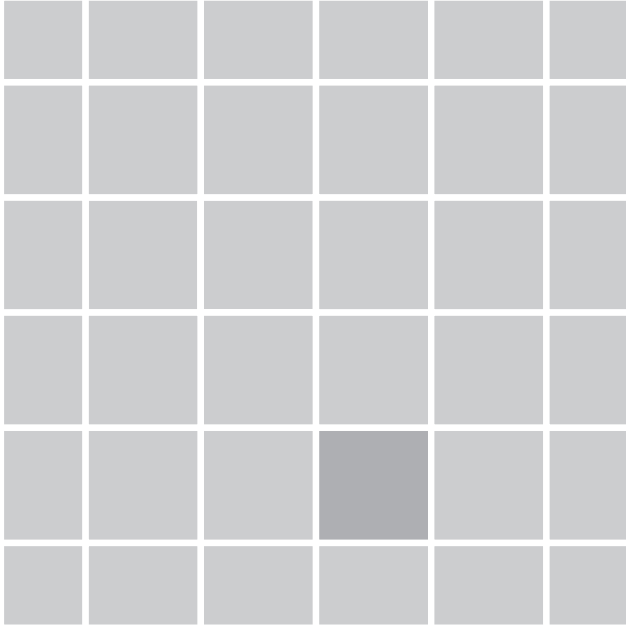

SQUARE TILE - ANY SIZE - 100%


2

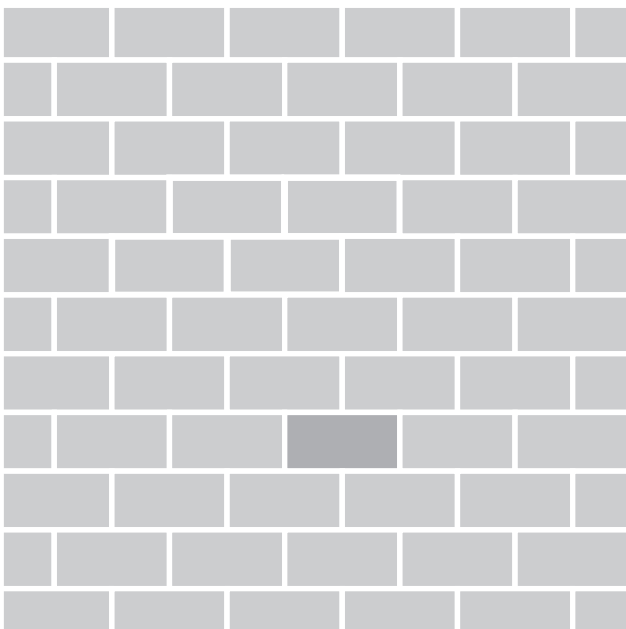

3"x6" - 100%  
12"x24" - 100%



3

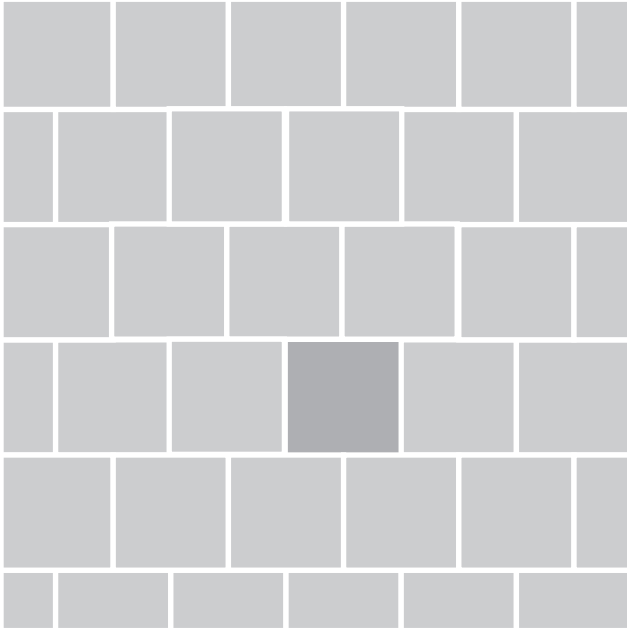


6"x6" - 100%  
12"x12" - 100%  
18"x18" - 100%

4




12"x24" - 100%

5

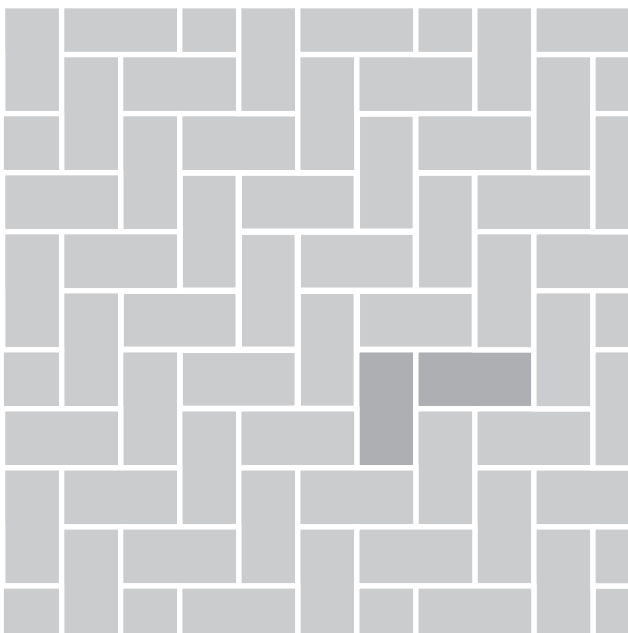


12"x24" - 100%  
18"x36" - 100%

6

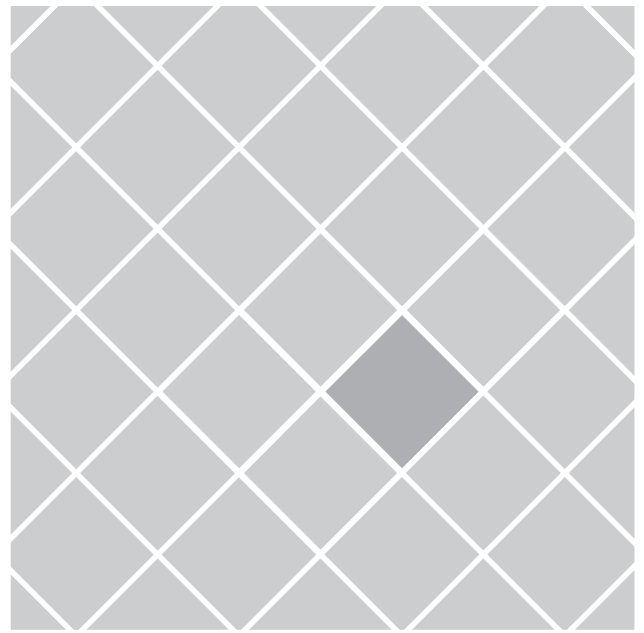


SQUARE TILE - ANY SIZE - 100%

7

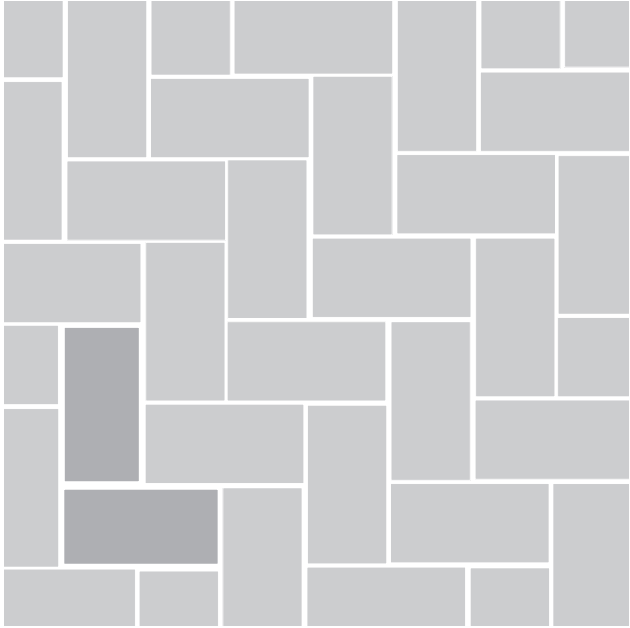

- ◆ 12"x24" - 100%
- ◆ 18"x36" - 100%


8

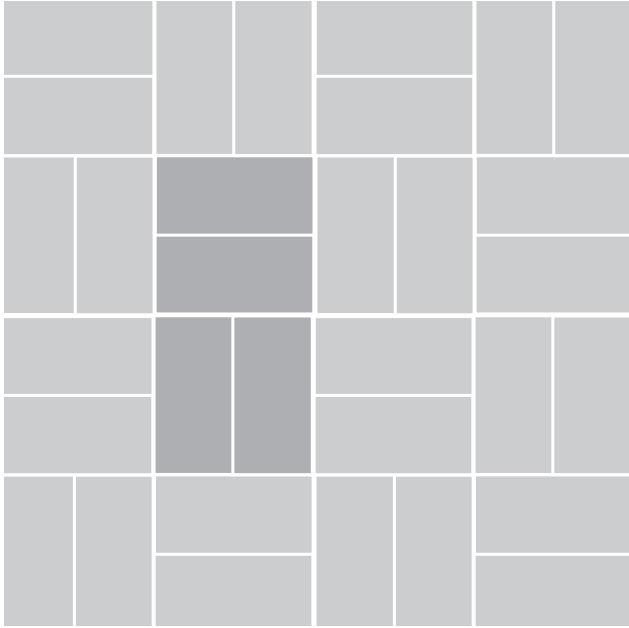

- ◆ 12"x24" - 100%
- ◆ 18"x36" - 100%




9

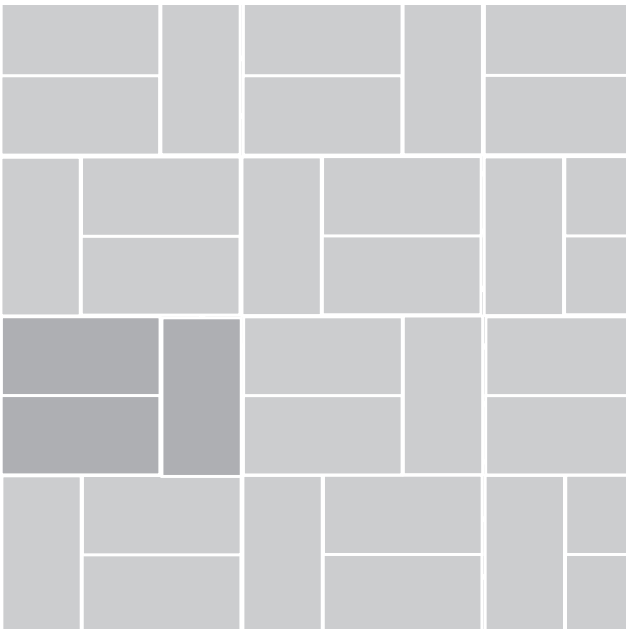

- ◆ 12"x24" - 100%
- ◆ 18"x36" - 100%

◆ MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16" IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

10

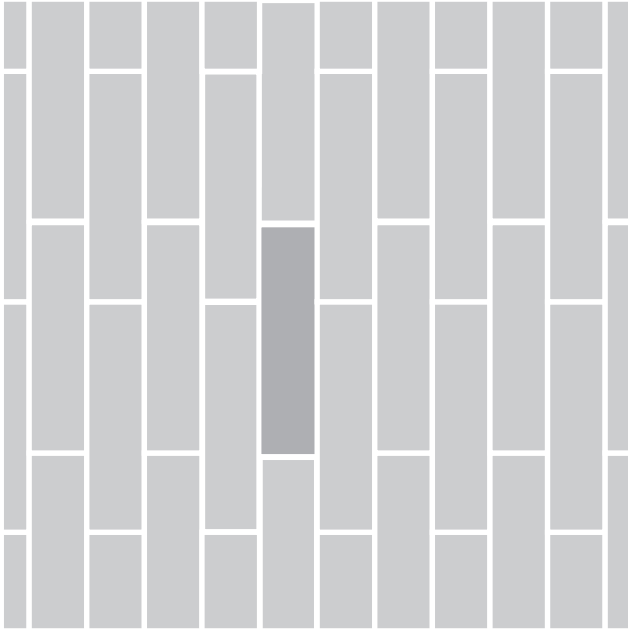

- ◆ 6"x24" - 100%
- ◆ 6"x36" - 100%

11




- ◆ 6"x24" - 100%
- ◆ 6"x36" - 100%



◆ MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16" IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

12

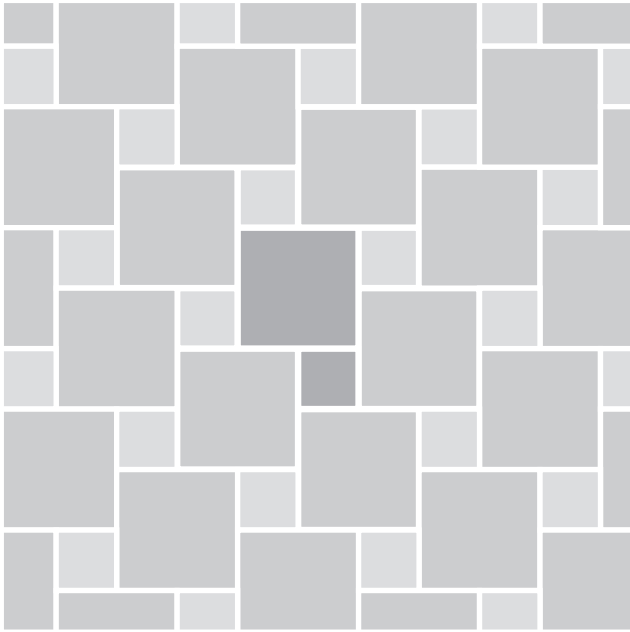

6"x6" - 20%  
12"x12" - 80%




13



12"x12" - 99.3%  
1"x1" - 0.7%

14

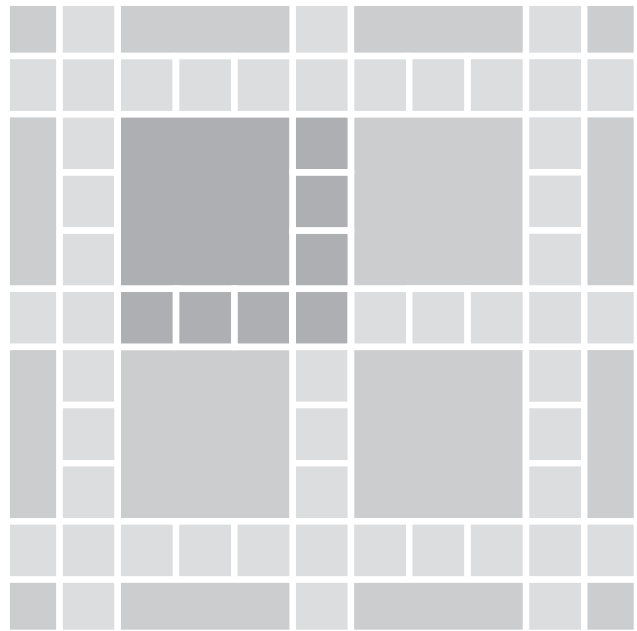


6"x6" - 44%  
18"x18" - 56%

15




12"x12" - 30.8%  
18"x18" - 69.2%

16

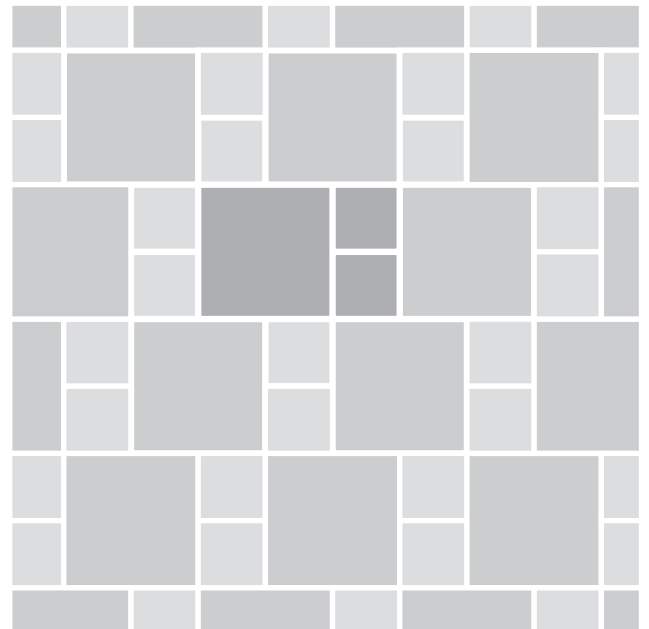


6"x6" - 33.3%  
12"x12" - 66.7%

17

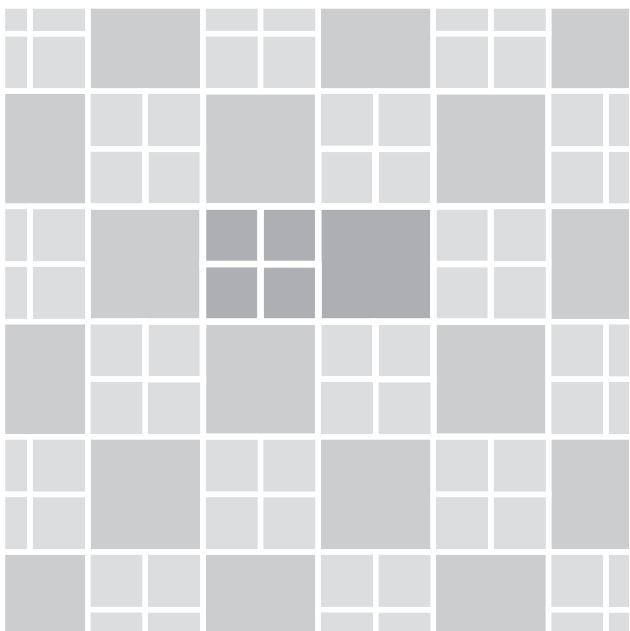


6"x6" - 50%  
12"x12" - 50%

18

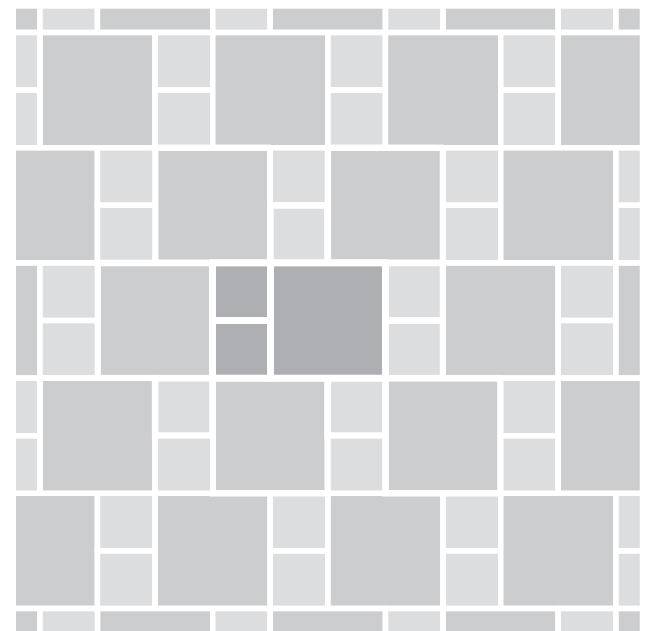


6"x6" - 33%  
12"x12" - 67%

19

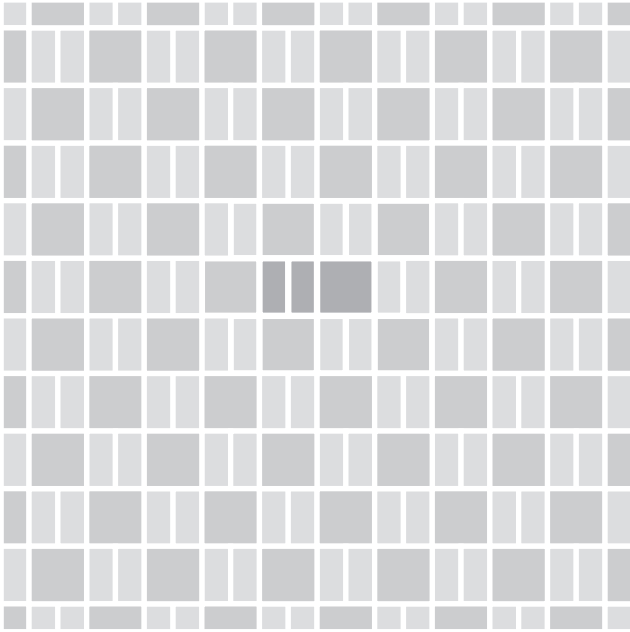


3"x6" - 50%  
6"x6" - 50%

20

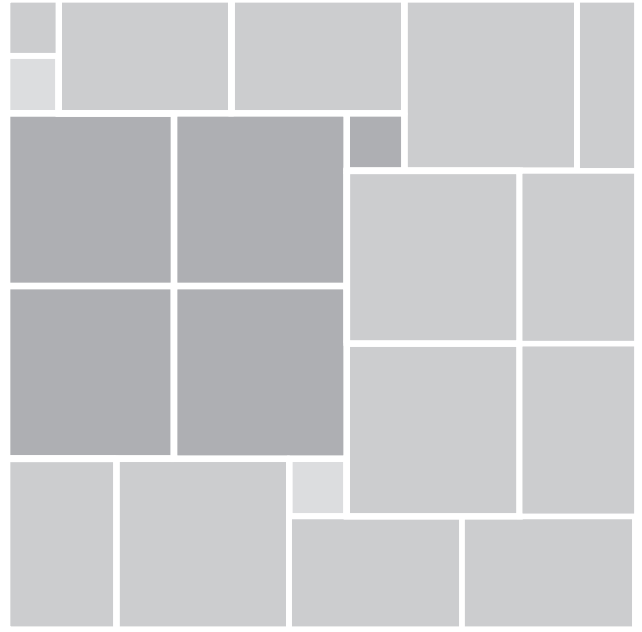


6"x6" - 2.7%  
18"x18" - 97.3%

21

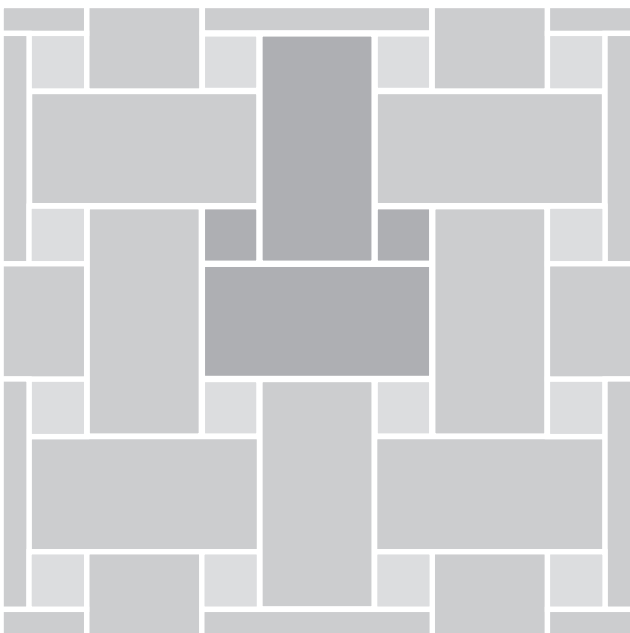


6"x6" - 11.1%  
12"x24" - 88.9%

22

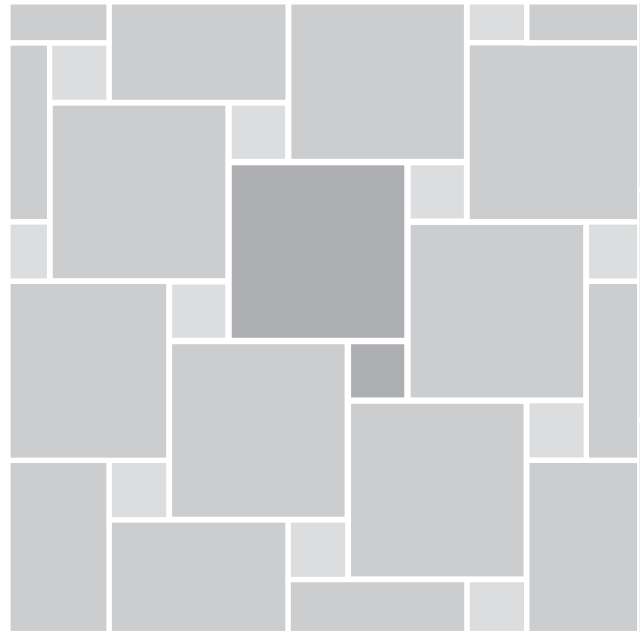


6"x6" - 2.7%  
18"x18" - 97.3%

23

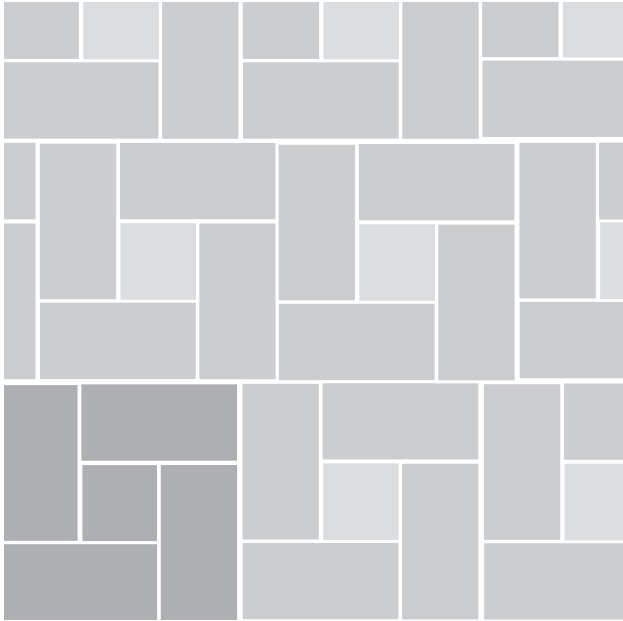

12"x12" - 15%  
◆ 12"x24" - 85%

24

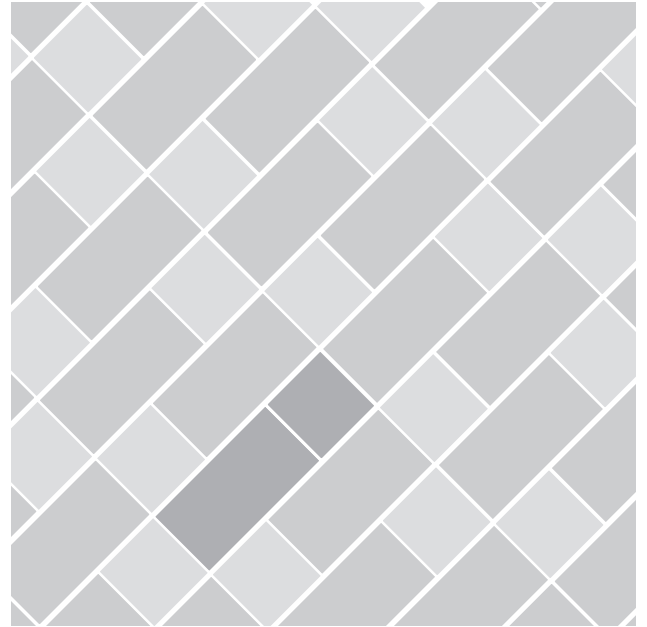


12"x12" - 33.33%  
◆ 12"x24" - 66.67%

25



◆ 12"x24" - 47.06%  
18"x18" - 52.94%

26

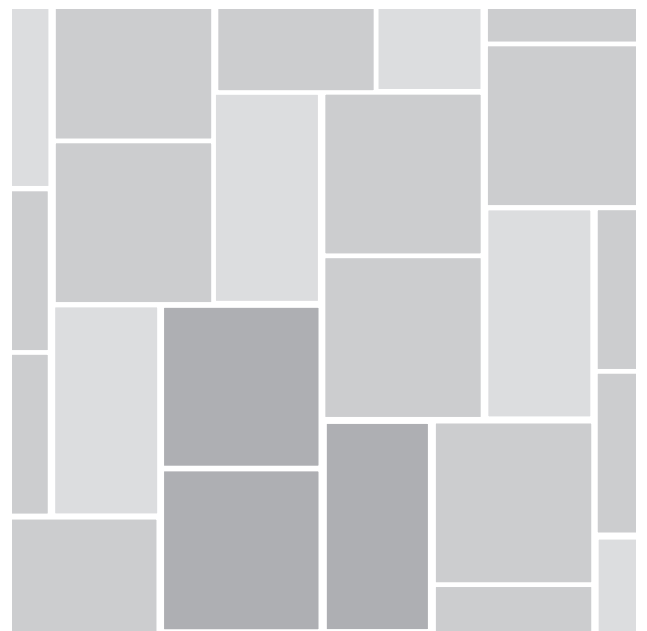


◆ 12"x24" - 30.77%  
18"x18" - 69.23%

27



6"x6" - 11.11%  
◆ 12"x24" - 88.89%

28

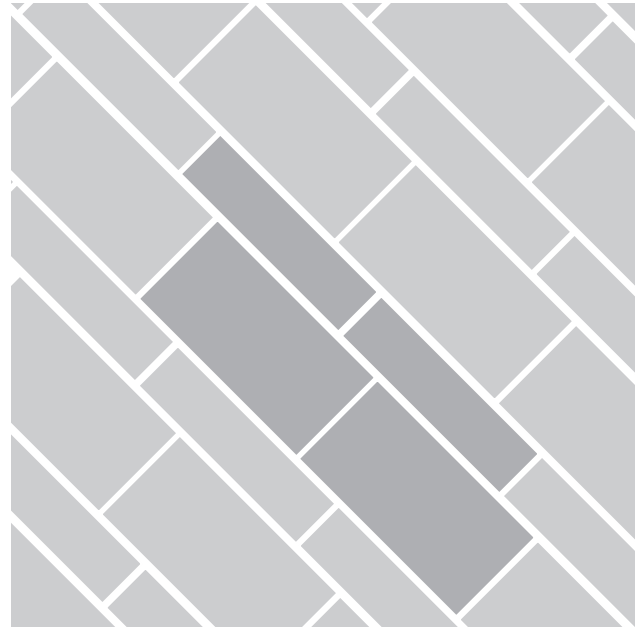


◆ 6"x24" - 33%      ◆ 6"x36" - 33%  
◆ 12"x24" - 67%      ◆ 18"x36" - 67%

29




6"x6" - 33.33%  
12"x12" - 66.67%

30

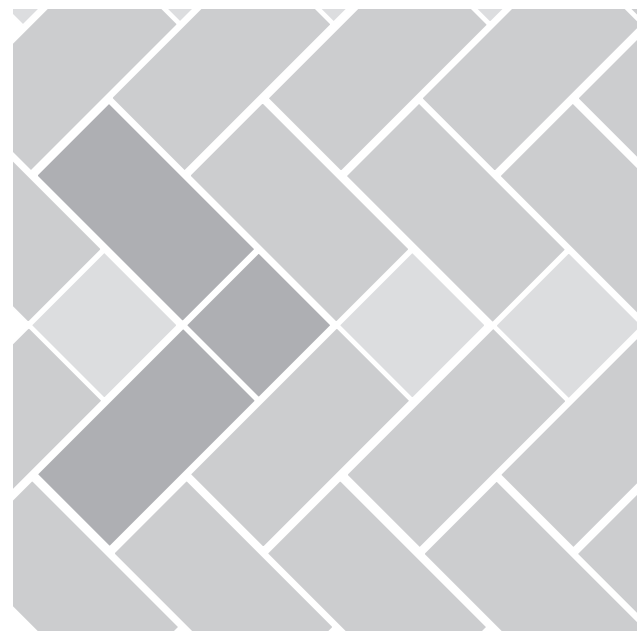


12"x12" - 20%  
◆ 12"x24" - 80%

31

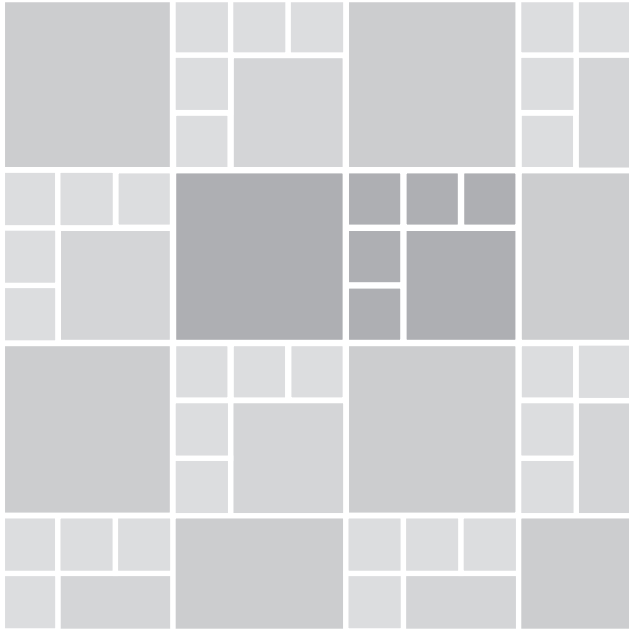

6"x6" - 28%  
12"x12" - 23%  
18"x18" - 50%

32

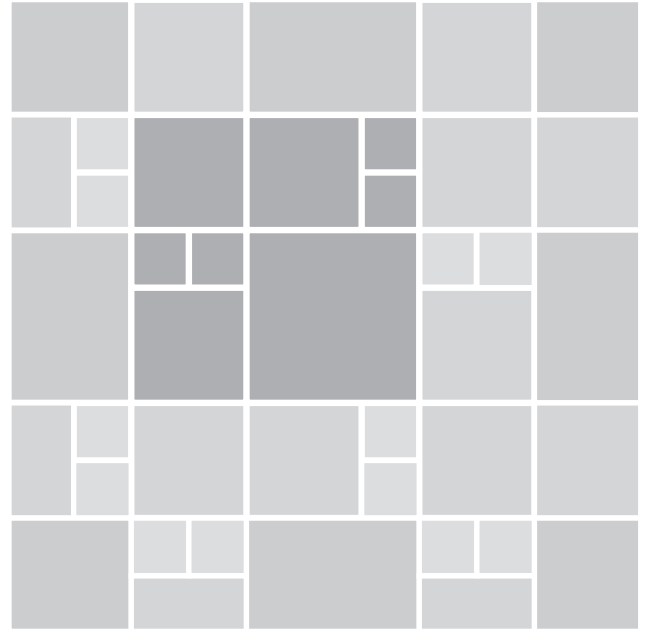

6"x6" - 16%  
12"x12" - 48%  
18"x18" - 36%

33



6"x6" - 16%  
12"x12" - 48%  
18"x18" - 36%

34



6"x6" - 6%  
12"x12" - 44%  
18"x18" - 50%

35




6"x6" - 5.56%  
 ◆ 12"x24" - 44.44%  
 18"x18" - 50%

36




6"x6" - 9.09%  
 12"x12" - 18.18%  
 24"x24" - 72.73%

37

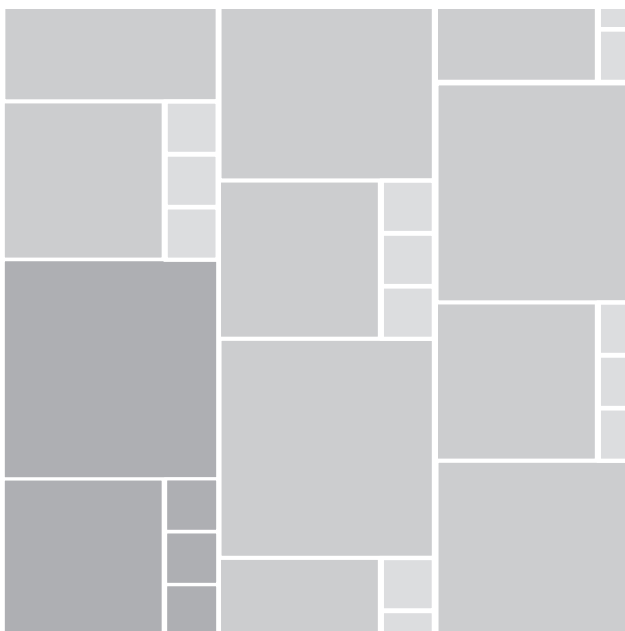

6"x6" - 10.71%  
 18"x18" - 32.14%  
 24"x24" - 57.15%


38

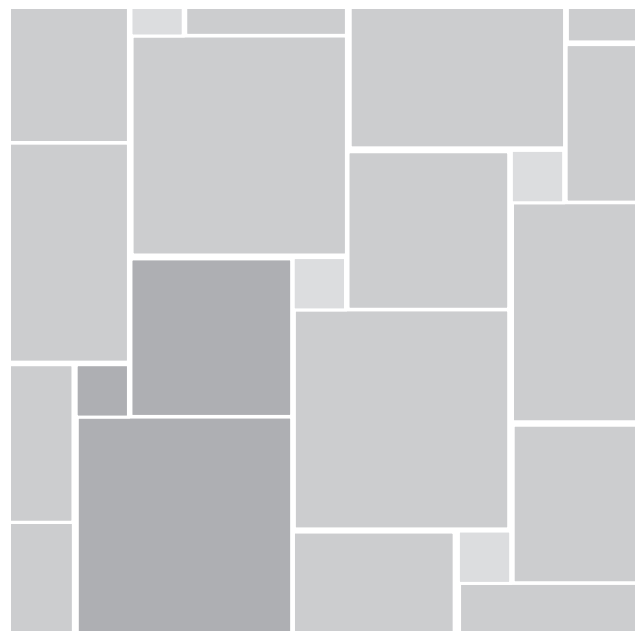

6"x6" - 3.85%  
 18"x18" - 34.61%  
 24"x24" - 61.54%


◆ MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16" IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

39

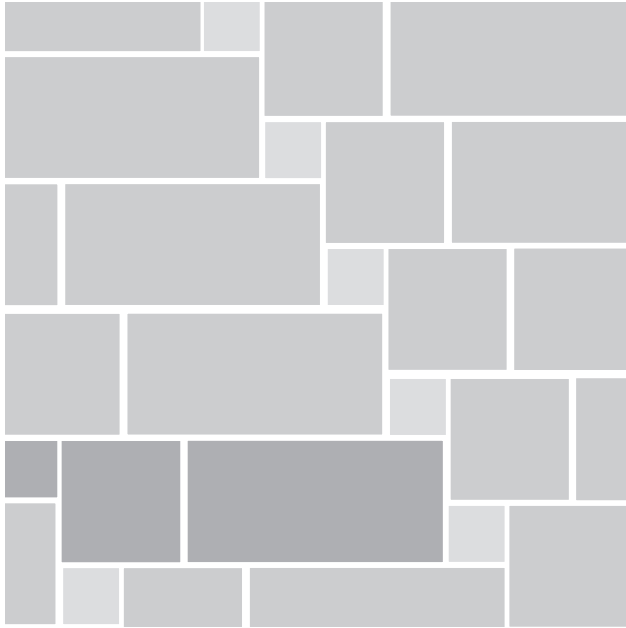

6"x6" - 7.69%  
12"x12" - 30.77%  
◆ 12"x24" - 61.54%

40

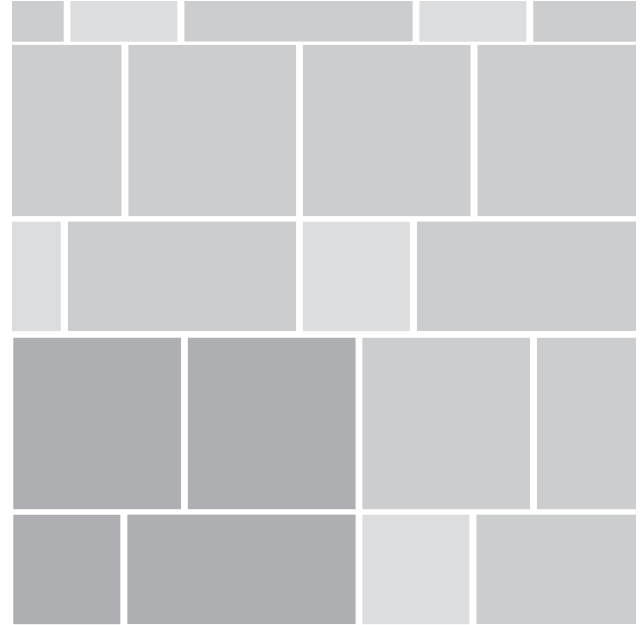


12"x12" - 13.33%  
◆ 12"x24" - 26.67%  
18"x18" - 60%

41




12"x12" - 19.05%  
◆ 12"x24" - 38.09%  
18"x18" - 42.86%

42

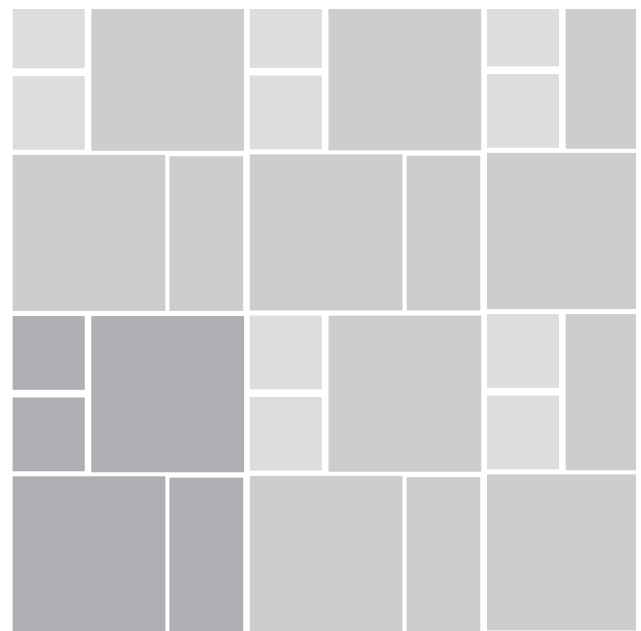

12"x12" - 16.67%  
◆ 12"x24" - 16.67%  
24"x24" - 66.66%

43

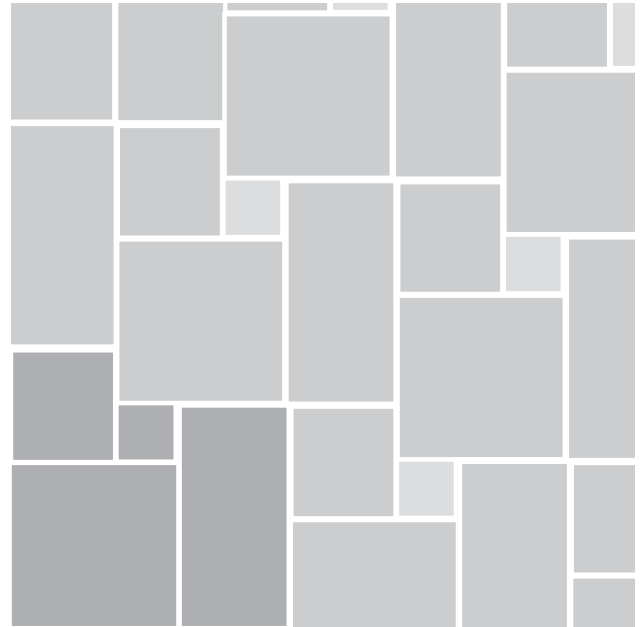

6"x6" - 4.55%  
 12"x12" - 18.18%  
 ◆ 12"x24" - 36.36%  
 18"x18" - 40.91%

44



6"x6" - 2.56%  
 12"x12" - 10.26%  
 ◆ 12"x24" - 41.03%  
 18"x18" - 46.15%

45



6"x6" - 8.70%  
 12"x12" - 17.39%  
 ◆ 12"x24" - 34.78%  
 18"x18" - 39.13%

◆ MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16" IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

**DISCLAIMER**

When laying multiple sized tiles it is crucial that you order the right quantities of each size with the same caliber. Florim USA's tiles are modular if using the same caliber and using a 3/16" grout joint.

Nevertheless, given the inherent variations of a man-made product, we strongly recommend that when working with a pattern the layout is first done in a dry test run before the tile is actually permanently set.

Please note that it is common for larger format tiles to be thicker than smaller format tiles. Particular attention should be paid to the thickness of each of the sizes in a multiple format pattern to ensure a consistent and even floor surface.

Never assume a room is perfectly square, be sure to square off from the center and begin your pattern along one edge.

This pattern selection was designed to be used as an inspiration tool to provide examples of floor patterns. Dimensionally these patterns work and the calculations are believed to be accurate and correct however, final responsibility for patterns, calculations and usage rests with the user and not Florim USA.



**LEED**



**RECYCLED CONTENT**



**PROGRESS THAT TOUCHES AND INVESTS IN THE ENTIRE SOCIETY**

As a active member of the U.S Green Building Council, Florim spreads awareness to the entire American communities and encourages towards the use of building solutions inspired by environmentally friendly practices. Using Florim products for project implementation, will positively contribute in obtaining scores and points required for earning the LEED certification (Leadership in Energy and Environmental Design).

**A COMMITMENT TO THE DEVELOPMENT OF PRODUCTS FOR A CONSCIOUS BUILDING TRADE**

Florim offers products containing recycled material. The adoption of eco-compatible production systems is merit of Italian designs produced in the U.S.

**TECHNICAL DEVELOPMENT THAT CONSIDERS THE NATURAL ENVIRONMENT**

Florim commits to the eco-compatible project and translates the same into an avant-gard production process, minimizing the negative impact on the environment.



300 International Blvd. Clarksville, TN 37040  
 Toll free: 1-877 - Florim1 (356-7461)  
 Phone: 931 645 5100  
[www.florimusa.com](http://www.florimusa.com)

**WHY PORCELAIN?**

There are many reasons to choose impervious porcelain tile over other floor coverings. It offers the largest array of design options and holds its value the longest. In a comparison between the many different flooring options, porcelain tile offers one of the most durable and least expensive options over the lifespan of the building.

**Benefits of Porcelain Tile**

- Impervious to water
- Easy to maintain
- Variety of design options
- Environmentally friendly
- Resistant to germs and bacteria
- Fade resistant
- Fire resistant
- Durable - best long-term value vs. other floor coverings

**HOW TO MAINTAIN YOUR PORCELAIN TILE**

- Sweep or vacuum regularly.
- Wash with a household cleaner and hot water then rinse with clean water (do not use wax, oil-based, or abrasive cleaners).

Find more care, maintenance, and installation tips at [www.florimusa.com](http://www.florimusa.com)



**WE BUILD  
AMERICAN**

